




Fast reach
to -20°C

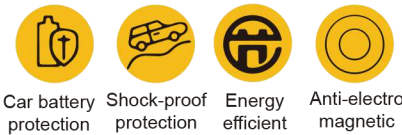


Mobile cold chain

Antech mobile cold chain offers premium quality and innovative cold chain solution to you. It is widely applied for Rvs, boats, campsites, medicine transportation. All you need is either a standard household AC power 100~240V 50Hz/60Hz or DC power 12/24V, like an automotive battery..

- ◇ Exquisite design ultra-large capacity;
- ◇ Dual zone model with two independent thermostats to control two independent compartments at the temperature of your choice;
- ◇ Smart digital controller ;
- ◇ 3-stage automatic power diagnose and cut off, in case of over load to protect the battery;
- ◇ High quality cabinet material to protect against deforming;
- ◇ High density foaming insulation to ensure longer hold over time;
- ◇ Ultra efficiency compressor;
- ◇ Anti-shake design;
- ◇ Can run with 12V/24V DC or 100~240V 50Hz/60Hz DC.



High quality cabinet material to protect against deforming



LED light



Smart Digital Control Panel

- Car battery protection
- Shock-proof protection
- Energy efficient
- Anti-electro magnetic

Dual rooms with two independent controllers



LED light



Removable metal handle



High quality cabinet material protect against deforming



Smart Digital Control Panel



Model	PRF-75/95/115
Temperature range	-20°C +10°C (32°C Ambient Temperature)
Working condition	10°C -45°C
Rated Voltage	DC 12V/24V/AC100~240V 50/60Hz
Rated Power	70W(+20%)
Cooling System	Ultra efficiency compressor/SECOP Compressor (DANFOSS/optional)
Forming Agent	C5H10/C-Pentane
Noise Level	≤40dB(A)
Cabinet Material	Powder coated galvanized steel/Stainless steel (Optional)
Color	Dark Gray/Light Gray/white
Optional Accessories	Basket

Model	Capacity	Product Size	Packing Size	Net Weight	Gross Weight	Refrigerant
PRF75	75L	811*482*512	906*575*585	24.8Kg	29.5Kg	R134a
PRF95	95L	811*482*592	906*575*665	28.4Kg	33.1Kg	R134a
PRF115	115L	811*482*672	906*575*745	31.9Kg	36.6Kg	R134a



Model	PRF-80/100/125
Temperature range	-20°C +10°C (32°C Ambient Temperature)
Working condition	10°C -45°C
Rated Voltage	DC 12V/24V/AC100~240V 50/60Hz
Rated Power	85W(+20%)
Cooling System	Ultra efficiency compressor/SECOP Compressor (DANFOSS/optional)
Forming Agent	C5H10/C-Pentane
Noise Level	≤40dB(A)
Cabinet Material	Powder coated galvanized steel/Stainless steel (Optional)
Color	Dark Gray/Light Gray/white
Optional Accessories	Basket

Model	Capacity	Product Size	Packing Size	Net Weight	Gross Weight	Refrigerant
PRF80	80L	872*516*506	965*605*575	28Kg	32.7Kg	R134a
PRF100	100L	872*516*586	965*605*655	30.5Kg	35.2Kg	R134a
PRF125	125L	872*516*653	965*605*735	33Kg	39.1Kg	R134a

Quality instruments, lifetime care



SOLE AGENT :
PT. PRIMA ALKESINDO NUSANTARA
 Komplek Perkantoran Gading Bukit Indah Blok C No. 12-15
 Jl. Bukit Gading Raya, Kelapa Gading, Jakarta Utara
 Telp. : 021-4513875 (Hunting) Fax. : 021-4513876
 E-mail : corporate@prima-alkesindo.com
 www.prima-alkesindo.com